






## Standard Specifications

FREQUENCY RANGE (MHZ)	10.000~200.000
Mode of Vibration	10.000~30.000MHz Fundamental 30.000~90.000MHz 3 rd Overtone 60.000~150.000MHz 5 th Overtone 90.000~200.000MHz 7 th Overtone
Drive Level (mW)	0.1 TYPICAL
Load Capacitance (pF)	8.0pF MIN
Frequency Tolerance (ppm)	± 10, ± 30
Shunt Capacitance (pF)	7 (MAX)
Operating Temperature Range	-20 °C ~70 °C
Frequency Stability (refer to 25 °C )	± 10ppm, ± 30ppm
Storage temperature Range	-40 °C ~+85 °C
Aging (refer to 25 °C )	± 5ppm (First Year)

## Equivalent Series Resistance

FREQUENCY RANGE (MHZ)	ESR (MAX) ( Ω )	FREQUENCY RANGE (MHZ)	ESR (MAX) ( Ω )
10.000~15.000	40	60.000~150.000	100
15.000~30.000	25	90.000~200.000	150
30.000~90.000	60		

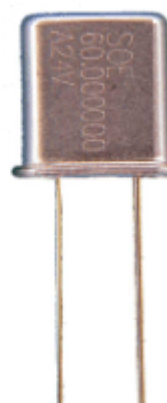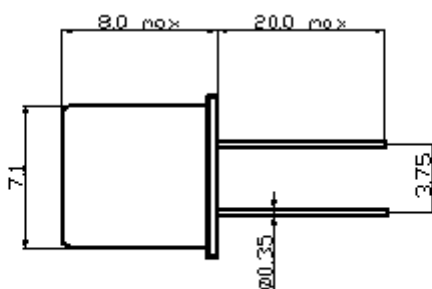

All Dimensions in mm

**CHINA NATIONAL SCIENTIFIC INSTRUMENTS & MATERILAS. CORP**

Salse Office: Suite L, 7F, Mansion No 1, GUO DU Development Building, No.182 Chaohui Road, 310014 Hangzhou P.R.China

TEL: 0086-571-85803723 85803731 85803732

FAX: 0086-571-85803724

E-mail: sales@csimc-freqcontrol.com thwu@mail.hz.zj.cn