




# U2 TYPE--HC-49/U GULL WING PIN CONFIGURATION

## Standard Specifications

FREQUENCY RANGE	1.8432~150.000
Mode of Vibration	1.8432~32.000MHz Fundamental 25.000~70.000MHz 3 rd Overtone 60.000~150.000MHz 5 th Overtone
Drive Level	0.1 TYPICAL
Load Capacitance	8.0pF MIN
Frequency Tolerance	± 10 、 ± 30 、 ± 50 ( at 25 °C )
Shunt Capacitance	7pF (MAX)
Operating Temperature Range	-20 °C ~+70 °C Standard
Frequency Stability	± 30ppm Standard
Storage Temperature Range	-40 °C ~+85 °C
Aging (First Year)	± 5ppm

## Equivalent Series Resistance

FREQUENCY RANGE (MHZ)	ESR MAX (Ω)	FREQUENCY RANGE (MHZ)	ESR MAX (Ω)
1.8432~1.999	750	5.500~5.999	50
2.000~2.399	500	6.000~7.999	40
2.400~2.999	300	8.000~9.999	35
3.000~3.199	200	10.000~12.499	30
3.200~3.699	100	12.500~15.999	25
3.700~4.199	100	16.000~32.000	20
4.200~4.899	70	25.000~70.000	40
4.900~5.4990	50	60.000~150.000	60

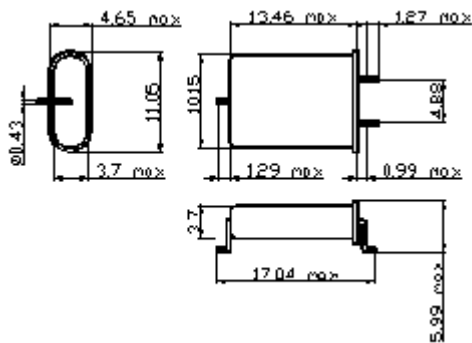

All Dimensions in mm

**CHINA NATIONAL SCIENTIFIC INSTRUMENTS & MATERILAS. CORP**

Salse Office: Suite L, 7F, Mansion No 1, GUO DU Development Building, No.182 Chaohui Road, 310014 Hangzhou P.R.China

TEL: 0086-571-85803723 85803731 85803732

FAX: 0086-571-85803724

E-mail: sales@csimc-freqcontrol.com thwu@mail.hz.zj.cn