


1.Package Dimension Unit: mm

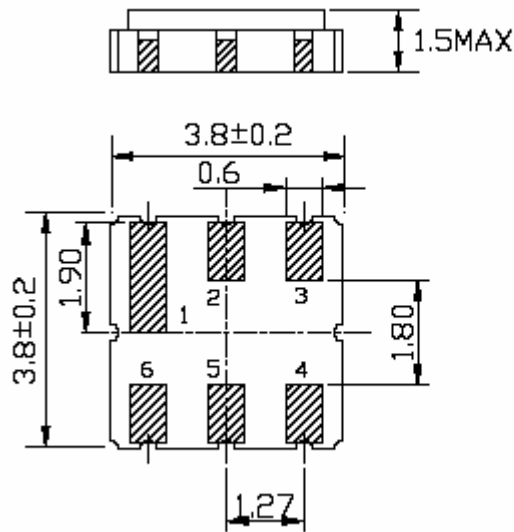

| Pin No. | Function |
|---------|----------|
| 2. | Input |
| 5. | Output |
| Other | Ground |

2.Electronic Characteristics

Electrostatic Sensitive Device (ESD)

| Item | Specification |
|---|---------------|
| Center Frequency (fo) | 430.0 MHz |
| Passband Width | fo ± 2.0 MHz |
| Insertion Loss fo ± 2.0 MHz | 4.5 dB max. |
| Passband Ripple fo ± 2.0 MHz | 1.5 dB max. |
| Stop Band Attenuation fo-100MHz ~ fo-40.8MHz | 50 dB min. |
| fo+40.8MHz ~ fo+100MHz | 50 dB min. |
| Terminating Impedance | 50 / 0pF |